



588



Synthetic FG Machinery Oil

OMEGA 588 Synthetic FG Machinery Oil

- NSF H1-registered + HALAL & KOSHER quality certified
- Formulated with premium synthetic base fluid of high viscosity index
- Exceptional wear protection and demulsibility
- Excellent air-release, anti-corrosion, anti-oxidation properties
- Compatible with seals, gaskets, and hoses
- Extends re-lubrication interval

TRUST OMEGA TO Save Money Enhance Performance Extend Service Life



Nonfood Compounds Program Listed
Category Code : H1
Registration Number : 150913 VG32
Registration Number : 150914 VG68



MAGNA INDUSTRIAL CO. LIMITED
Total Quality Maintenance

SPECIAL FEATURES

OMEGA 588 Synthetic FG Machinery Oil is formulated with FDA-approved synthetic base fluid of high viscosity index to offer reliable protection and lubrication to processing machineries in virtually all food & beverage and pharmaceutical plants.

- **OMEGA 588** offers inherently exceptional wear protection, maintaining or even extending the service period of processing machineries.
- **OMEGA 588** offers superb temperature--viscosity characteristics, protecting and lubricating effectively equipment under various pressure and temperatures.
- **OMEGA 588** separates rapidly from water, lowering the risk of lubricating oil deterioration caused by water contamination and thus prolonging the re-lubrication interval.
- **OMEGA 588** is NSF H1-registered and meets the HALAL and KOSHER quality standards.


OUTSTANDING PROPERTIES

OMEGA 588 Synthetic FG Machinery Oil is quality engineered to outperform and outlast mineral or white oil based food grade machinery oil.

- **OMEGA 588** offers excellent air-release, anti-corrosion and anti-oxidation properties, minimizing the risk of premature machine failure and lubricating oil deterioration caused by air-entrainment, corrosion sludge and carbon deposits.
- **OMEGA 588** is compatible with all sorts of general sealing materials, gaskets, and hoses. It reduces the extra maintenance costs due to oil leakage.
- **OMEGA 588** can be used as multi-purpose food grade lubricating oil in processing systems / equipment operating at a wide range of temperatures -- from -35°C to 160°C.

USE FOR

- **Use OMEGA 588** for hydraulic and circulating systems, pumps, low to medium loaded oil-lubricated bearings, valve lubrication, etc. in the food & beverage and pharmaceutical industries.
- **OMEGA 588** is suitable for use in food processing plants demanding HALAL and KOSHER certified lubricating oil.
- **OMEGA 588** is available in ISO VG 32 & 68.

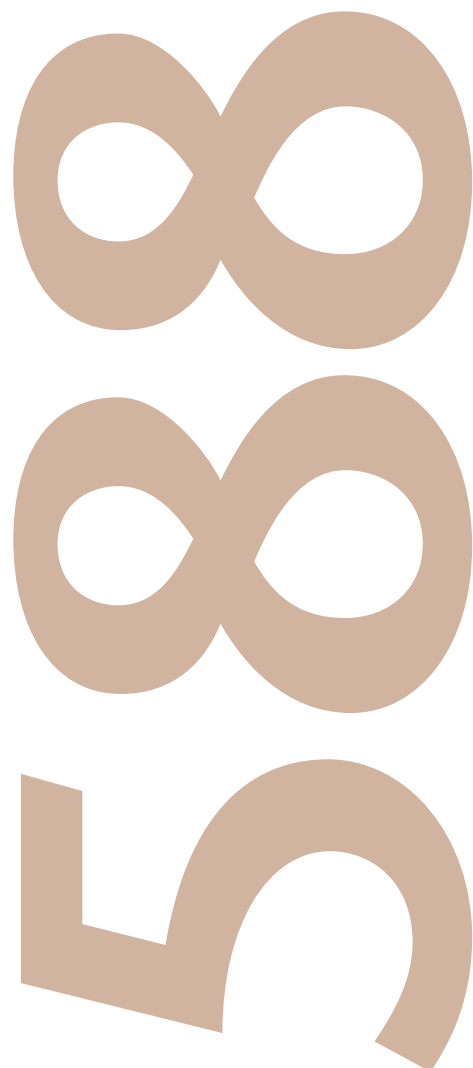

Omega

The Ultimate Lubricant

Magna Industrial reserves the right to modify or change this product for purposes of improving its performance characteristics.
© 2015 Magna Industrial Co. Limited.

The Omega trade mark is the property of ITW, Inc., and is used under licence by Magna Industrial Co. Limited

MAGNA INDUSTRIAL CO. LIMITED
— Total Quality Maintenance —

The information contained in this publication supersedes all relevant information previously released and is to the best of our knowledge and accurate at the time of issue in January, 2015